

# High CRI LED Ceiling light

## 高演色性 LED ライト



ARTH TECH CO., LTD.  
有限会社 アーステック



### LIN-612FG

Color : Foggy  
LED Quantity : High CRI 5050LED x6pcs  
Dimension :  $\varnothing$  48 x T8 (mm)  
Input Voltage : 12V DC

Features :

- (1) Small and thin design
- (2) Use HIGH CRI LED (CRI>80) to achieve nature light near the sun. It makes human eyes feel comfortable.
- (3) Stable illumination by constant current circuit design.

外見色:半透明色  
LED数:高演色性 5050LED x6pcs  
寸法: $\varnothing$ 48 x 厚8 (mm)  
入力電圧:12V DC

特徴:

- (1) コンパクトで超薄い設計。
- (2) 太陽光に近い自然な光(演色指数>80)を実現。目に優しく疲れにくい。
- (3) 定電流仕様(供給電力が上下に変化しても明るさが一定。)

Model NO.	Version / バージョン
LIN-612FG-NW	LED Color : Nature White / LED色:自然光色
LIN-612FG -WW	LED Color : Warm White / LED色:電球色



### LIN-613FG

Color : Foggy  
LED Quantity : High CRI 5050LED x6pcs  
Dimension :  $\varnothing$  70 x T17 (mm)  
Input Voltage : 12V DC

Features :

- (1) Use HIGH CRI LED (CRI>80) to achieve nature light near the sun. It makes human eyes feel comfortable.
- (2) Replace the halogen spotlight.
- (3) Stable illumination by constant current circuit design.

外見色:半透明色  
LED数:高演色性 5050LED x6pcs  
寸法: $\varnothing$ 70 x 厚17(mm)  
入力電圧:12V DC

特徴:

- (1) 太陽光に近い自然な光(演色指数>80)を実現。目に優しく疲れにくい。
- (2) ハロゲンスポットライトを取替える。
- (3) 定電流仕様(供給電力が上下に変化しても明るさが一定。)

Model NO.	Version / バージョン
LIN-613FG-NW	LED Color : Nature White / LED色:自然光色
LIN-613FG -WW	LED Color : Warm White / LED色:電球色

Contents, specifications and availability are subject to changes serving the technical improvement.  
仕様・価格は、改良のため予告無く変更することがありますので、予めご了承ください。




ARTH TECH CO., LTD.  
有限会社 アーステック

ARTH offers parts for motorhomes, caravans, trailers, and motor vehicles.

Tel:+886-32807956 Fax:+886-32807957 <http://www.arthtech.net> E-mail:service@arthtech.net

A1C04

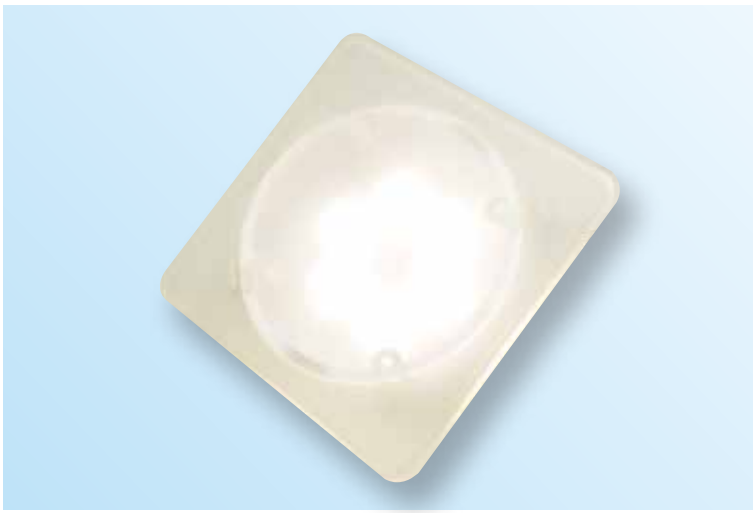

## LIN-614FG

Color : Foggy  
 LED Quantity : High CRI 5050LED x6pcs  
 Dimension : 70 x 70 x 17(mm)  
 Input Voltage : 12V DC

Features :

- (1) Use HIGH CRI LED (CRI>80) to achieve nature light near the sun. It makes human eyes feel comfortable.
- (2) Replace the halogen spotlight.
- (3) Stable illumination by constant current circuit design.

外見色:半透明色

LED数:高演色性 5050LED x6pcs


寸法:70 x 70 x 17(mm)

入力電圧:12V DC

特徴:

- (1) 太陽光に近い自然な光(演色指数>80)を実現。目に優しく疲れにくい。
- (2) ハロゲンスポットライトを取替える。
- (3) 定電流仕様(供給電力が上下に変化しても明るさが一定。)

Model NO.	Version / バージョン
LIN-614FG-NW	LED Color : Nature White / LED色:自然光色
LIN-614FG -WW	LED Color : Warm White / LED色:電球色

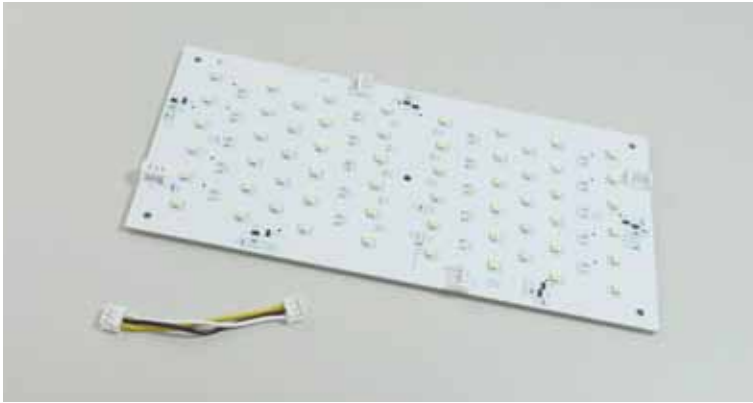

## LIN-805PB ~ LIN-808PB

High-intensity LED Ceiling Light PCBA  
 高輝度LED天井灯基板

Color : White PCB

LED Quantity :

High-intensity white 3528LED x 48pcs

Yellow 3528LED x 10pcs

Dimension : 200 x 100 x 8(mm)

Features :

- (1) Easy to combine several PCBs together by exclusive harness (71mm) to make a large light.
- (2) Stable illumination by constant current circuit design.

外見色:白色基板

LED数:高輝度白色3528LED x 48pcs

黄色3528LED x 10pcs


寸法:200 x 100 x 8 (mm)

特徴:

- (1) 専用のハーネス(71mm)によって数枚基板を簡単に取り合わせて大きなライトが作れる。
- (2) 定電流仕様(供給電力が上下に変化しても明るさが一定。)




Model NO.	Version / バージョン
LIN-805PB-CW	Input Voltage : 12V DC , Single package 入力電圧:12V DC;単品梱包
LIN-806PB-CW	Input Voltage : 12V DC , Industrial package 入力電圧:12V DC;量産梱包
LIN-807PB-CW	Input Voltage : 24V DC , Single package 入力電圧:24V DC;単品梱包
LIN-808PB-CW	Input Voltage : 24V DC , Industrial package 入力電圧:24V DC;量産梱包

### Example / 接続例



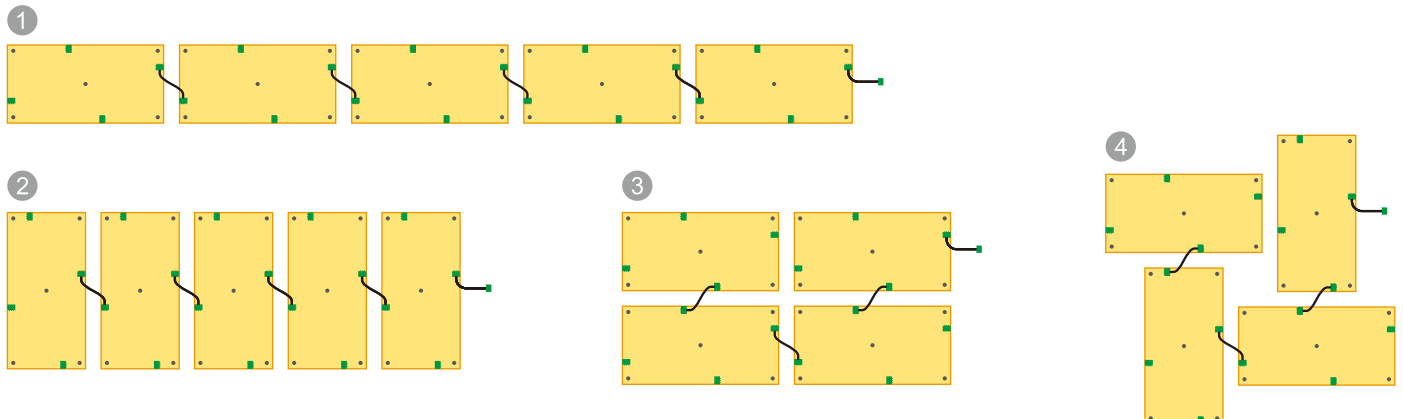


# Installation

## LIN-612FG

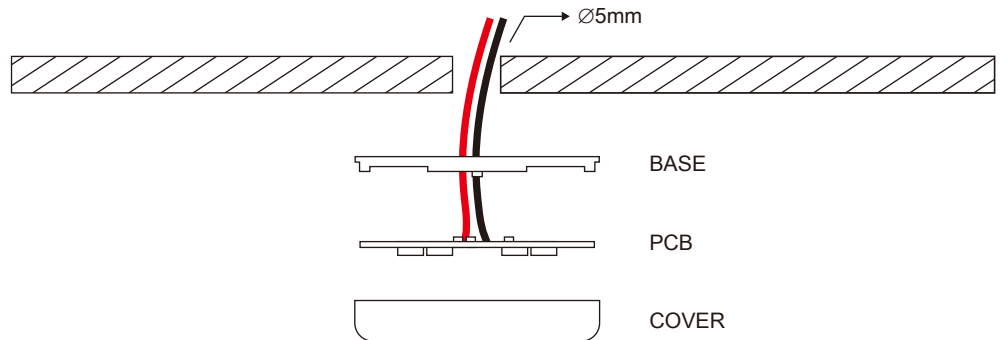

## LIN-613FG

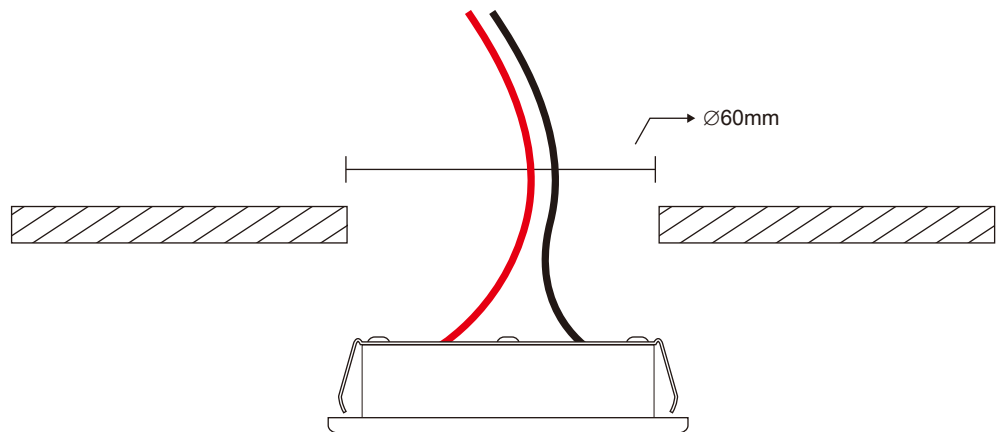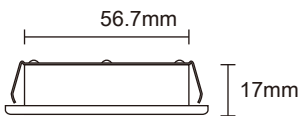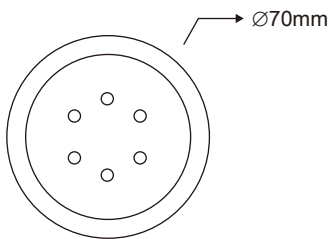

## LIN-614FG

